


DOVE™ Polygon Scanner - 15mm Aperture @ 8K RPM

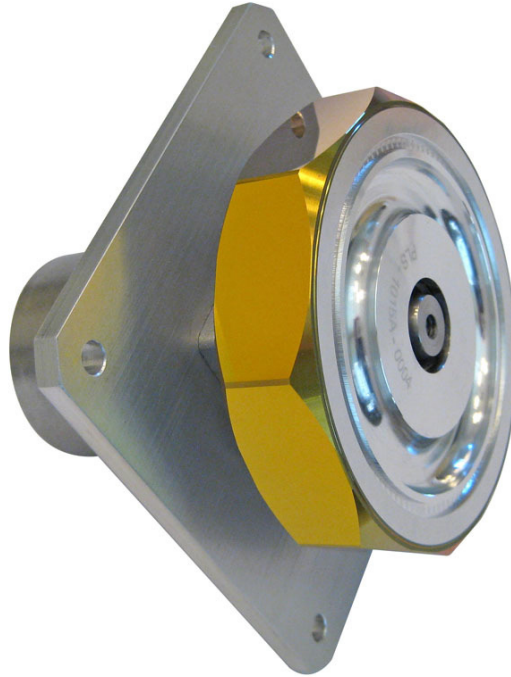

Multi-Kilowatt Laser Damage Threshold!

DOVE™ is an intermediate size polygon laser scanner with a top speed of 8,000 RPM. Polygon scanners produce a linear scan speed of up to hundreds of meters per second which can be >10x galvanometer speed. The 15 mm aperture is suitable for material processing at >5KW as well as LIDAR, inspection, imaging and other high-speed raster scanning applications. The Sapphire protected gold coating is especially durable.

Need polygon speed but not familiar with how to implement polygon scanning technology? Precision Laser Scanning provides the tools to help you quickly implement a polygon scanner. That includes:

- Start Of Scan detection.
- Synchronize laser to polygon.
- Synchronize galvo or stage and laser to polygon.

Learn more about these products and implementation at <http://precisionlaserscanning.com>

Standard models have short lead time and low prices! Custom facet counts and coatings will be considered for volume requirements. Feel free to contact us with questions.

DOVE™ SPECIFICATIONS


Speed: 1,000 – 8,000 RPM
Speed control: TTL Ext freq reference
& internal reference (not infinitely variable)
Rotation: CW standard
Facet Flatness: $\lambda/6$ @ 633 nm per inch
Surface Roughness: < 70Å RMS
Surface quality: 60/40
Dynamic track: < 45 arc sec
Facet-Facet: < 5 arc sec total
Facet-Datum < 10 arc sec total
Jitter: < 0.02%
Speed stability: < 0.02%
Bearing: Ball bearing
Operating attitude: Any
Supply Voltage: 24 VDC
Max Current: < 3.0 A
Time to speed: < 60 sec
Motor-Controller cable: 300 mm

Controller Power-I/O cable: 500 mm
Controller: 80 W x 130 L x 40 H mm
Start/Stop control: TTL
Speed sync signal: TTL
Shipping & Storage: -20C to +70C
Operating: 15C to 45C, 10-80% RH
Facets: 8
Coating: Sapphire protected AU for IR
Scan angle: up to \approx 50 degrees
(depending on spot size and beam feed angle)
Scan Rate: 133 to 1067 Hz
Inscribed Diameter: 4.00" (101.6 mm)
Mirror thickness: 0.90" (22.86 mm) at center
Laser Damage Threshold >5KW
Facet clear aperture: 1.57" x 0.59"
(39.9 x 15.0 mm)


OPTIONAL START OF SCAN DETECTION

SOS detection is required to achieve accurate line to line registration with any polygon scanner. It is used to synchronize a CW or pulsed laser to the scanner. (Galvo scanners need absolute encoders, polygon scanners need Start-Of-Scan detection.) Read more about it here:

<http://precisionlaserscanning.com/start-of-scan-sos-detection-for-polygon-scan-heads/>



Mini-SOS Detection Kit

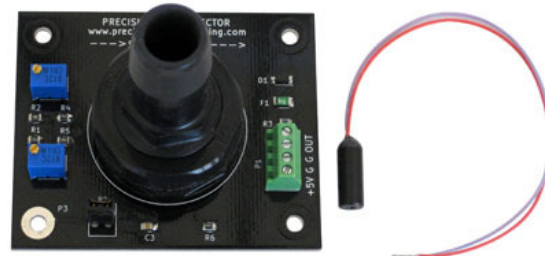

Universal SOS Detection Kit

Precision Laser Scanning, LLC
25750 North 82nd Street
Scottsdale, Arizona 85255 USA
TEL 1-480-515-1643
info@precisionlaserscanning.com
www.precisionlaserscanning.com

Specifications subject to change without notice.
13JUN20

